


Accu-Cast

AC 2071 “Control-Flow”

Liquid Pre-wet System



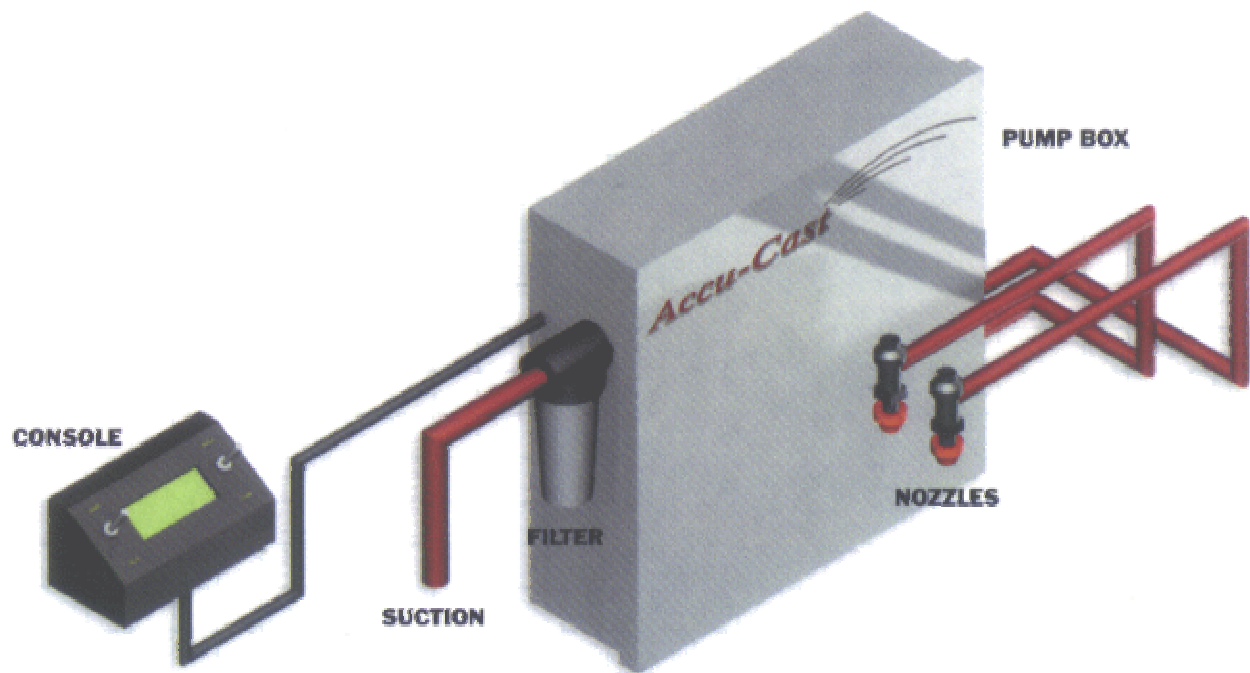

ACCU-CAST 2071 LIQUID OUTPUT RATES PER APPLICATION RATES AND SPEEDS

**L / MIN @ 30
KM / HR**

KG / KM @	0.50%	1.50%	2%	3%	5%	7%	10%	12%	15%	30%
50	0.1	0.3	0.4	0.6	1	1.4	2	2.4	3	6
125	0.25	0.75	1	1.5	2.5	3.5	5	6	7.5	15
250	0.5	1.5	2	3	5	7	10	12	15	30
600	1.2	3.6	4.8	7.2	12	16.8	24	28.8	36	72
855	1.7	5.1	6.8	10.2	17	23.8	34	40.8	51	102

**L / MIN @ 40
KM / HR**

KG / KM @	0.50%	1.50%	2%	3%	5%	8%	10%	12%	15%	30%
50	0.13	0.39	0.52	0.78	1.3	2.08	2.6	3.12	3.9	7.8
100	0.26	0.78	1.04	1.56	2.6	4.16	5.2	6.24	7.8	15.6
195	0.5	1.5	2	3	5	8	10	12	15	30
300	0.75	2.25	3	4.5	7.5	12	15	18	22.5	45
600	1.5	4.5	6	9	15	24	30	36	45	90
855	2.22	6.66	8.88	13.32	22.2	35.52	44.4	53.28	66.6	133.2



L / MIN @ 60
KM / HR

KG / KM @	0.50%	1.50%	2%	3%	5%	7%	10%	12%	15%	30%
50	0.2	0.6	0.8	1.2	2	2.8	4	4.8	6	12
125	0.5	1.5	2	3	5	7	10	12	15	30
250	1	3	4	6	10	14	20	24	30	60
600	2.4	7.2	9.6	14.4	24	33.6	48	57.6	72	144
855	3.4	10.3	13.7	20.52	34.2	47.9	68.4	82	102.6	205

 WITHIN RANGE

 OUT OF RANGE

Note

:

These rates are proportionate to the amount of sand or salt that is being applied therefore no attempt is made to refer to the number of lanes covered the actual coverage for two lanes would be half that for one lane.

WHEN OUT OF RANGE LIQUID WILL STILL BE APPLIED.

BELOW RANGE APPLICATION WILL BE HEAVY.

ABOVE RANGE APPLICATION WILL BE LIGHT.